
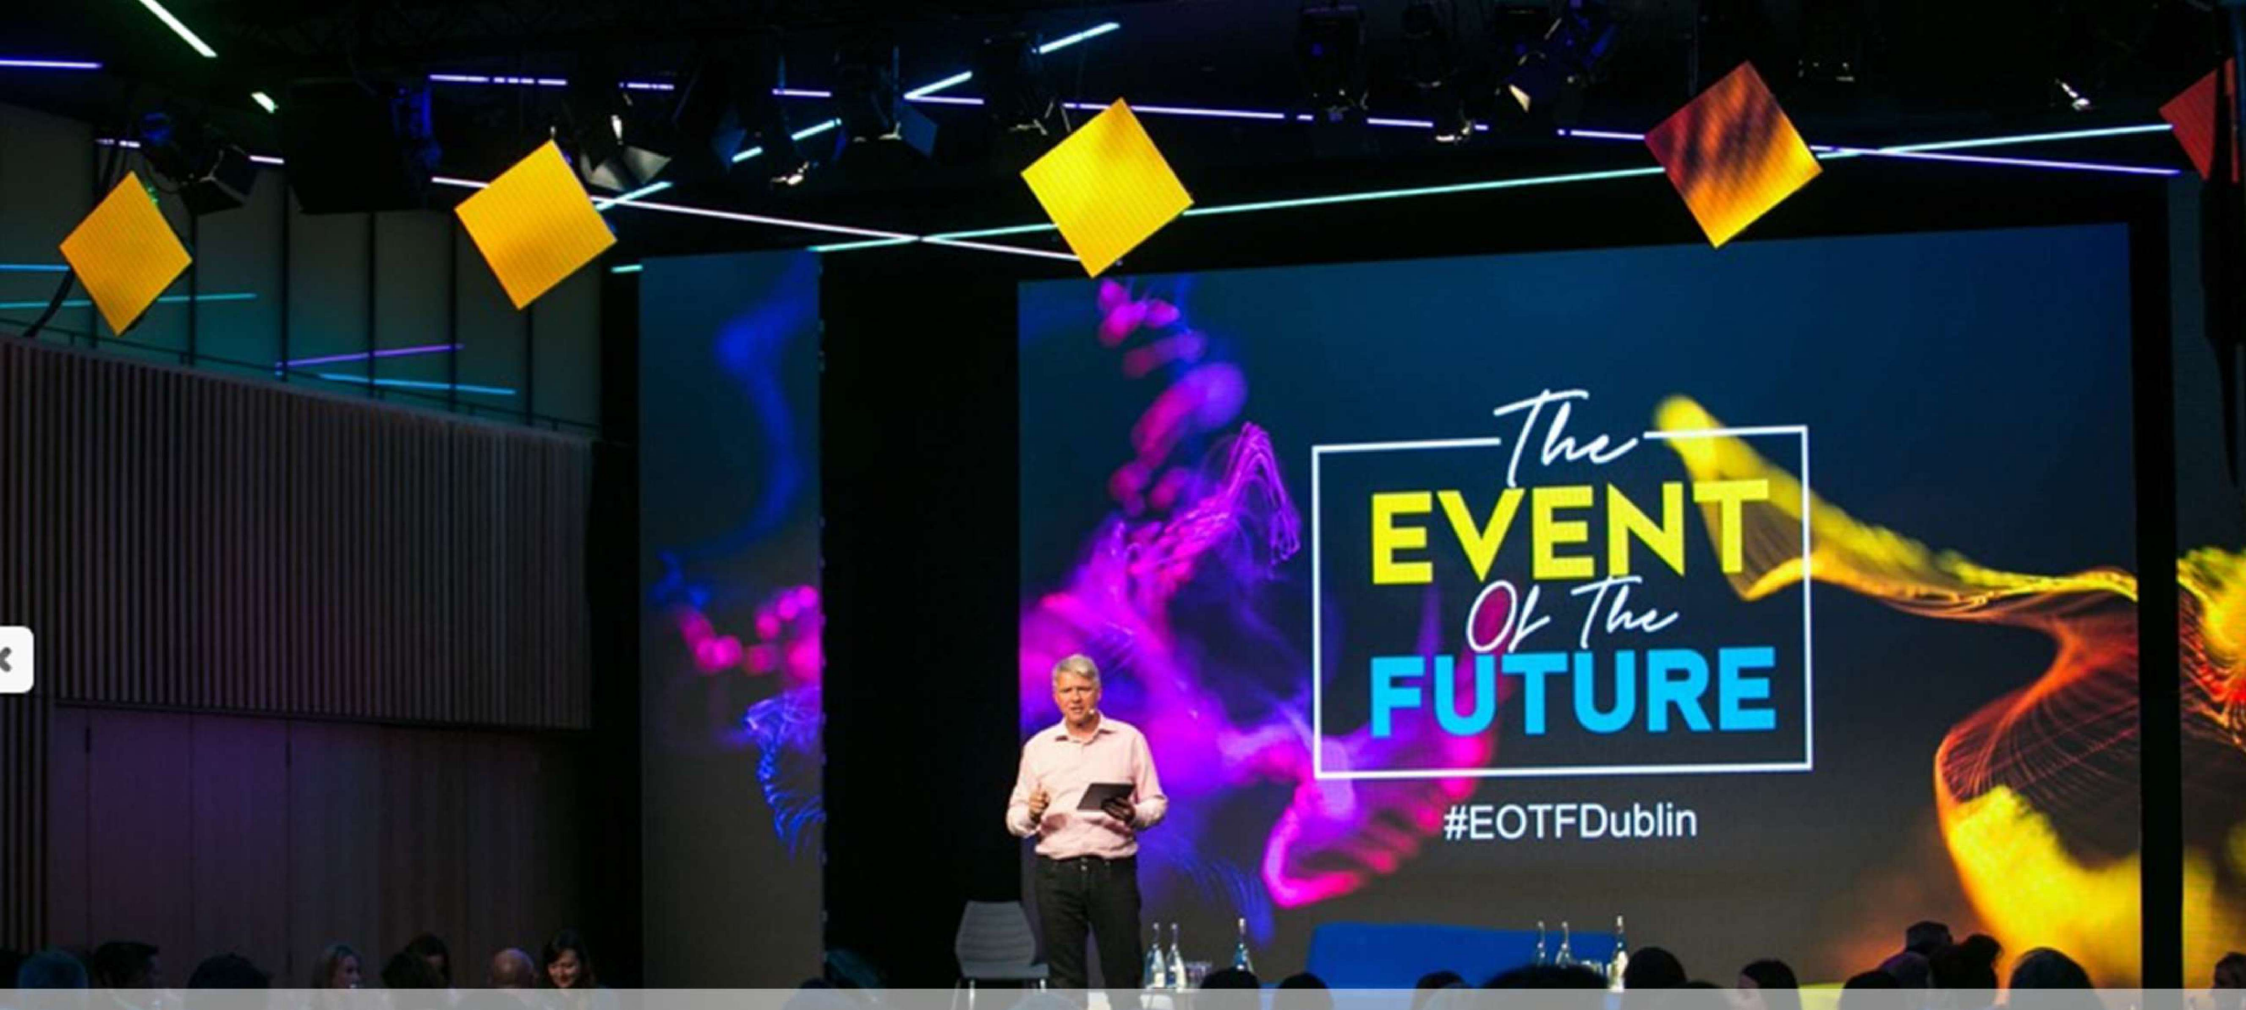


Rental LED Screen
RS Series
Indoor / Outdoor

RENTAL LED DISPLAY

NSELED Co . LTD

Add: Bldi,Yali Ind Park,TianBao Rd,ShiYan,BaoAn,District,Shenzhen,China **Web**:www.nseled.com **Email:**sales@nseled.com

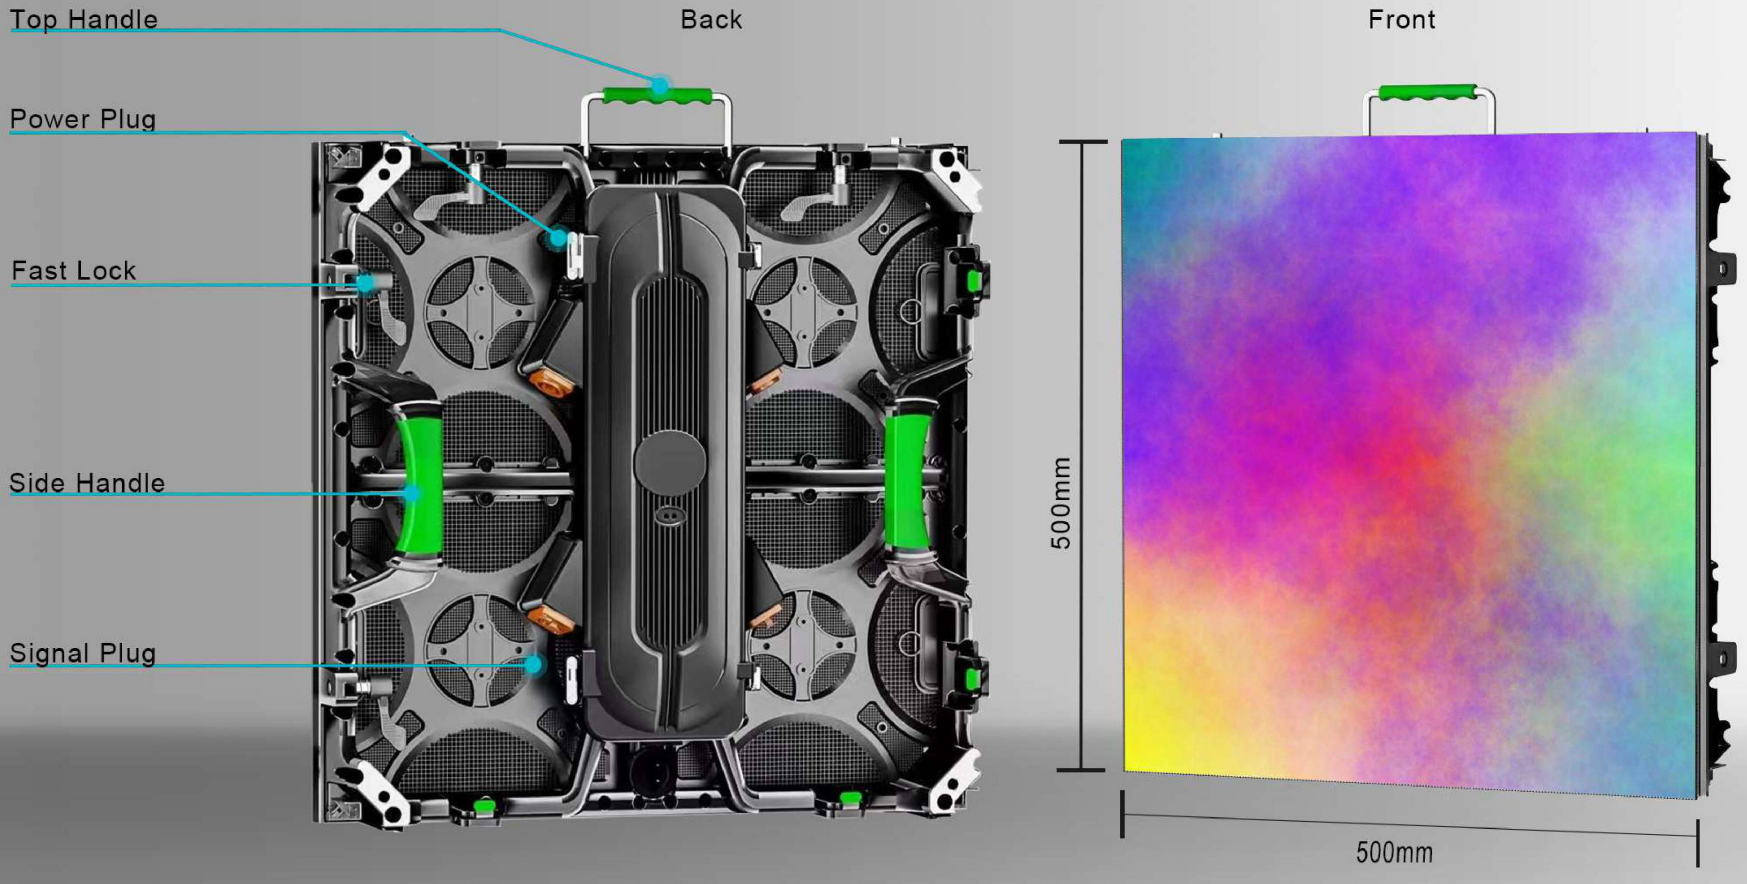

Rental LED Display: RS



500*500mm



500*1000mm

Ultra lighweight and super slim


500*500mm and 500*1000mm standard cabinet size can be free mix splicing to meet the size for different projects and shaps.

Ultra-Lightweight die-casting aluminum with high precision when splicing And the ultra-thin thickness is only 75mm. Easy transport and Portable.

KEY FEATURES

Outdoor Rental LED Display

Outdoor rental LED panels are typically suitable for outdoor events, which require higher brightness and weatherproof rating but a larger pixel pitch.Rental LED Display has pixel pitch options of 3.91mm and 4.81mm. This line provides a brightness of 4500 nits and an IP65 rating against dust and water jets.

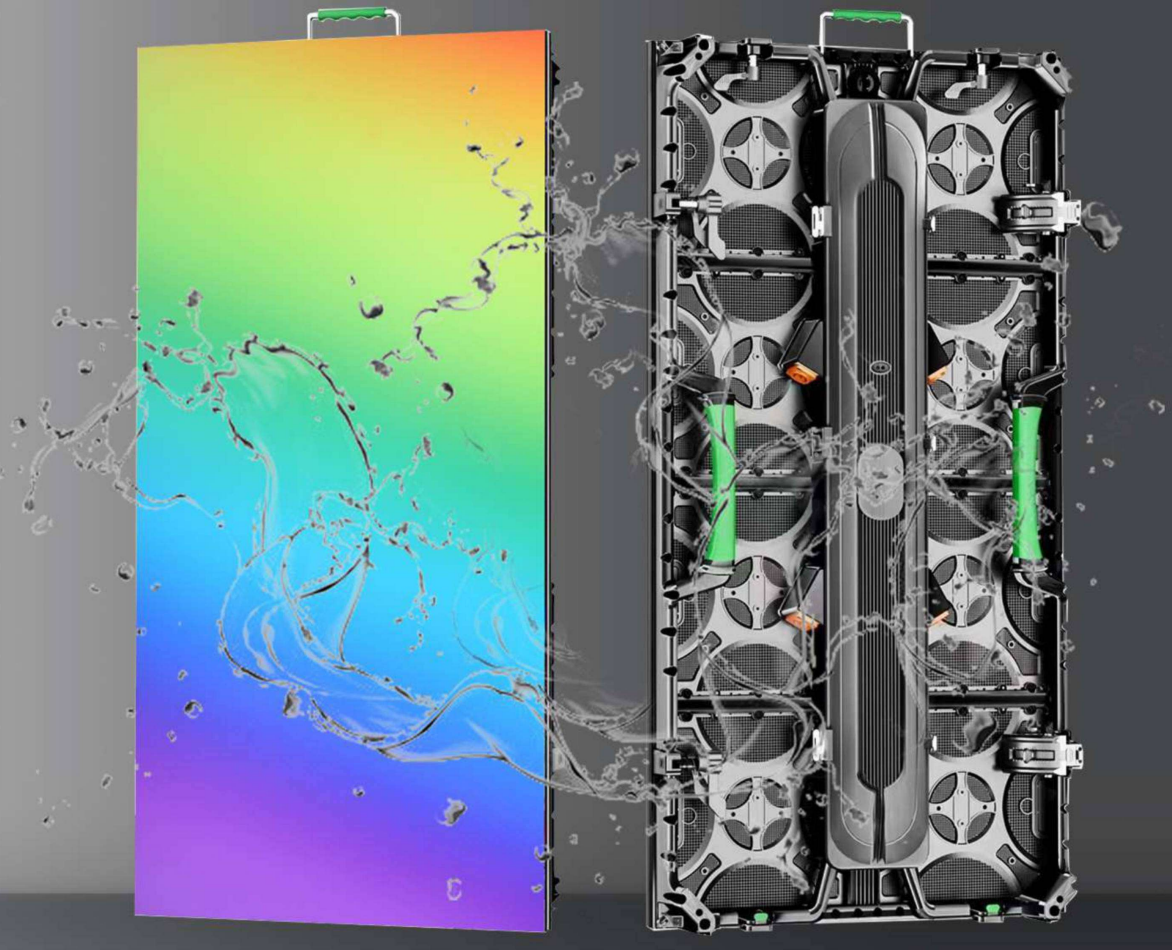

Indoor / Outdoor Rental LED Display

PRODUCT FEATURES

Multiple Installation

- Hanging
- Wall-Mounted
- Ground Stacking



More Features

- Brightness contrsat
- Modular Design
- Low Nosie
- Easy Install
- Color
- Wide View

NSE LED CASE




Melbourne
CUP


SPAR
SPAR
EUROSPAR
Our Shared
Future
CONVENTION 2014






beyonce

Type	RS-Rental LED Display					
Model:	IR-P1.9	IR-P2.6	IR-P2.976	IR-P3.91	OR-P3.91	OR-P 4.81
Pixel pitch	1.9mm	2.6mm	2.976mm	3.91mm	3.91mm	4.81mm
Destiny	262,114 Dots/M2	147,456 Dots/M2	112,896 Dots/M2	655,36 Dots/M2	655,36 Dots/M2	43,264 Dots/M2
LED Type	SMD1010	SMD1515	SMD2121	SMD2121	SMD1921	SMD2727
Pixel type(R / G / B)	1R1G1B (3 in 1)	1R1G1B (3 in 1)	1R1G1B (3 in 1)	1R1G1B (3 in 1)	1R1G1B (3 in 1)	1R1G1B (3 in 1)
Module size	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm	250*250mm
Module Resolution	128*128 Pixel	96*96 Pixel	84*84 Pixel	64*64 Pixel	64*64 Pixel	52*52 Pixel
Cabinet Size (H*W)	500*500mm	500*500mm	500*500mm	500*500mm	500*500mm	500*500mm
Cabinet Resolution (PX* PX)	256*256 Pixel	192*192 Pixel	168*168 Pixel	128*128 Pixel	64*64 Pixel	52*52 Pixel
Cabinet Size (H*W)	500*1000mm	500*1000mm	500*1000mm	500*1000mm	500*1000mm	500*1000mm
Cabinet Resolution (PX* PX)	256*512 Pixel	192*384 Pixel	168*336 Pixel	128*256 Pixel	128*256 Pixel	52*104 Pixel
Drive mode	1/32 scan	1/16 scan	1/32 scan	1/16 scan	1/16 scan	1/13 scan
Weight	7/13 KG	7/13 KG	7/13 KG	7/13 KG	7/13 KG	7/13 KG
Viewing Distance	＞1m	＞1m	＞2m	＞3m	＞3m	＞4m
Brightness	1000nits	1000nits	1000nits	1000nits	4500nits	4500nits
IP Rating	IP43	IP43	IP43	IP43	IP65	IP65
Maximum Power Consumption	680W	660W	650W	600W	700W	740W
Average Power Consumption	200W	210W	195W	180W	210W	220W
Application	Indoor	Indoor	Indoor	Indoor	Outdoor	Outdoor
Case Material	Die-casting aluminum	Die-casting aluminum	Die-casting aluminum	Die-casting aluminum	Die-casting aluminum	Die-casting aluminum
Viewing Angle	140° (H)/140°(V)	140° (H)/140°(V)	140° (H)/140°(V)	140° (H)/140°(V)	140° (H)/140°(V)	140° (H)/140°(V)
Input voltage	110-220V	110-220V	110-220V	110-220V	110-220V	110-220V
Grey Scale（bit）	16bit	16bit	16bit	16bit	16bit	16bit
Refresh rate(HZ)	1920 or 3840 optional	1920 or 3840 optional	1920 or 3840 optional	1920 or 3840 optional	1920 or 3840 optional	1920 or 3840 optional
Control method:	Sync&Async	Sync&Async	Sync&Async	Sync&Async	Sync&Async	Sync&Async
Temperature Operating (℃)	-20℃ + 80℃	-20℃ + 80℃	-20℃ + 80℃	-20℃ + 80℃	-20℃ + 80℃	-20℃ + 80℃
Working Humidity	10%RH~90%RH	10%RH~90%RH	10%RH~90%RH	10%RH~90%RH	10%RH~90%RH	10%RH~90%RH
Services access	Dual (Front and Rear)	Dual (Front and Rear)	Dual (Front and Rear)	Dual (Front and Rear)	Dual (Front and Rear)	Dual (Front and Rear)
Certificate	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC